
| | |
|---|---|
| Customer No: | No.1 |

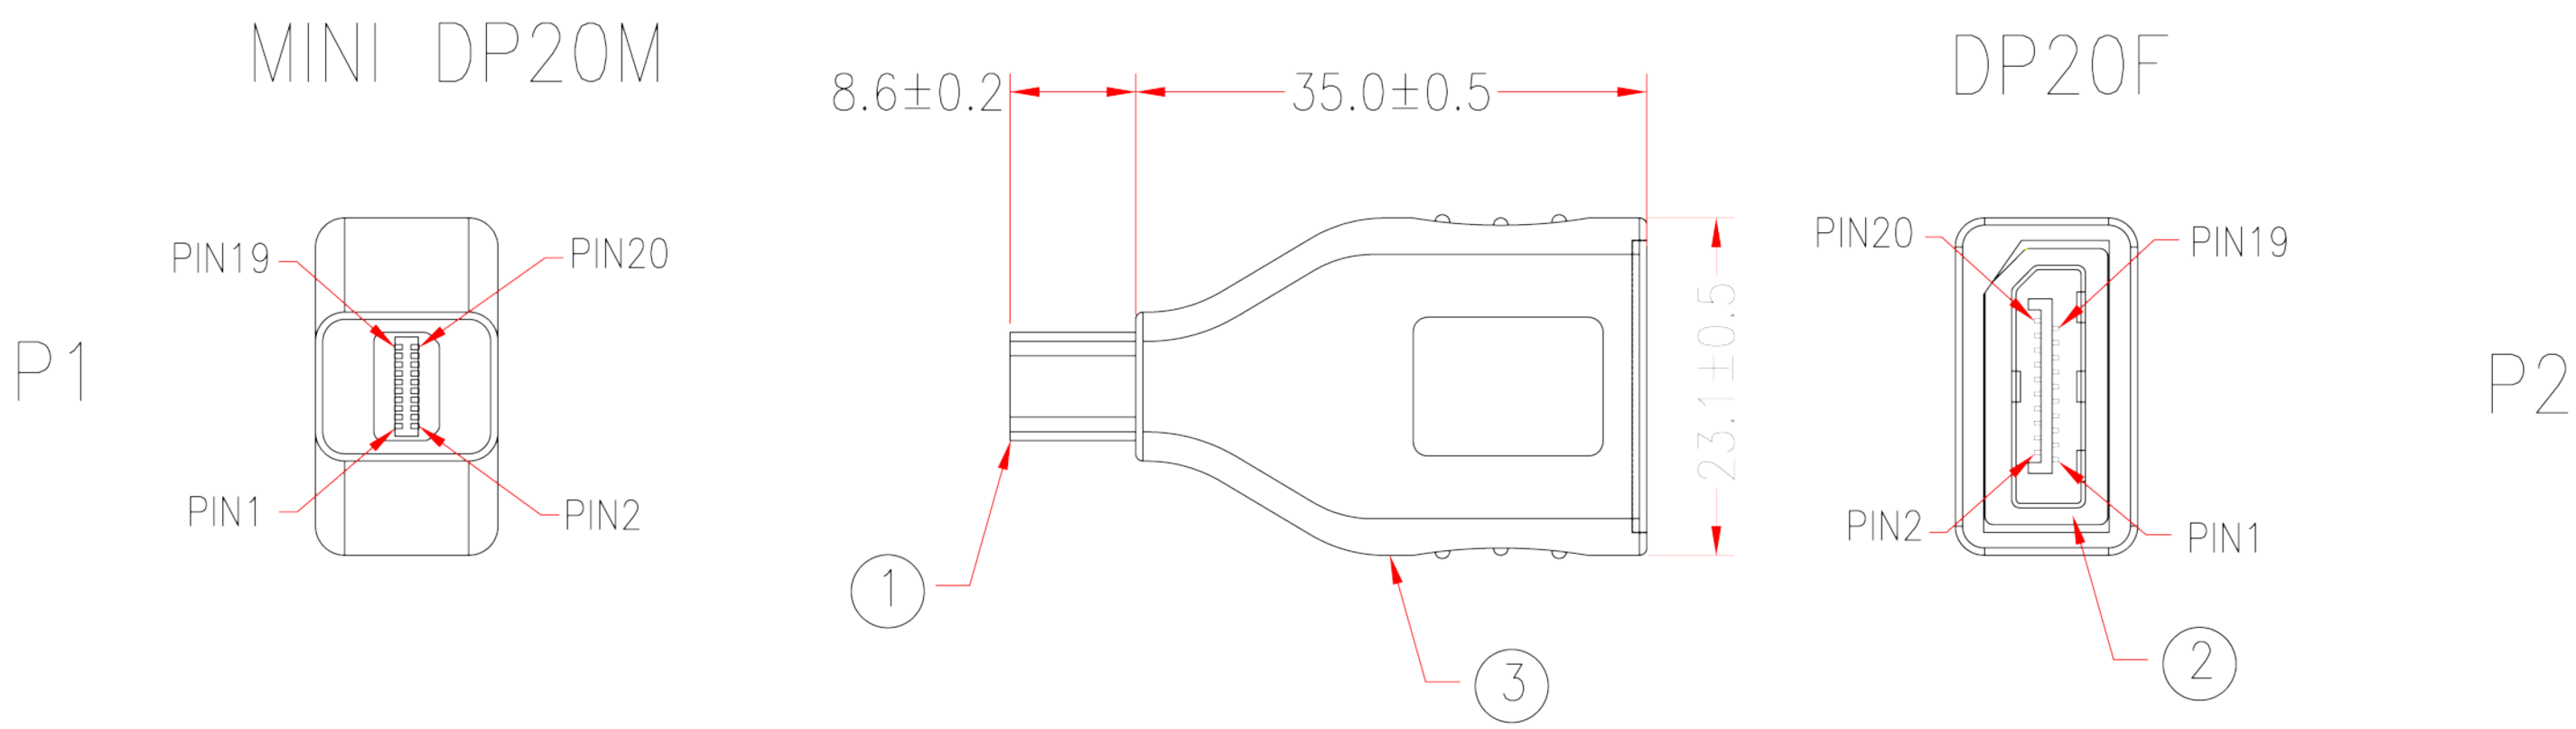


## 4563

| P1 | P2 | P1 | P2 |
|---|---|---|---|
| 1 | 2 | 12 | 12 |
| 2 | 18 | 13 | 8 |
| 3 | 1 | 14 | 16 |
| 4 | 13 | 15 | 7 |
| 5 | 3 | 16 | 15 |
| 6 | 14 | 17 | 9 |
| 7 | 5 | 18 | 17 |
| 8 | 11 | 19 | 19 |
| 9 | 4 | 20 | 20 |
| 10 | 10 | SHIELD | SHIELD |
| 11 | 6 | | |

NOTE: All relevant materials are complied with RoHS directive .

| No. | DESCRIPTION | Q'TY | Supplier |
|---|---|---|---|
| 3 | UL1061 28AWG INSULATOR WIRE, LENGTH 25mm, ID0.9, DRAWING No.EH002801C-024 | 1 | M304 |
| | MOLDED PE COLOR TRANSPARENT | | M280 |
| | MOLDED PVC WHITE(HA8250) | | M304 |
| | PCB: MSL-74 | 1 | M730 |
| 2 | DP20 FEMALE, GOLD PLASH ON CONTACTS AND GOLD CONNECTOR, BLACK INSULATOR(62S020S-30A4F-B) | 1 | M24 |
| 1 | MINI DP20 MALE, GOLD PLASH ON CONTACTS AND GOLD CONNECTOR, WHITE INSULATOR(DP20-WS1G-MN13) | 1 | M977 |

| | | |
|---|---|---|
| APPROVED | | |
| CHECKED | HU | |
| DRAWING | JIANG | |
| DATE | 04/AUG/11 | ITEM NO. MDPM-DPF |

Comprehensive Connectivity Company

Cable Length Unless Other Spec. Tolerances:

| | |
|---|---|
| 0 ~200mm | ±10mm |
| 201~1000mm | ±20mm |
| 1001 ~1500mm | ±25mm |
| 1501~2100mm | ±30mm |
| 2100mm↑ | ±40mm |

UNIT:mm

CHECKED